

goslyn™ Grease Recovery Device Specification Sheet



The innovative (patent pending) goslyn™ is an immiscible liquid separator which operates under hydro static pressure and does not require any moving parts. It continuously and permanently removes Fats, Oils & Greases from waste effluent - keeping your drains free and clear while eliminating the need for costly dousing systems or grease trap pumping. Discharged oil can be recycled along with your used fryer oil!




goslyn™ Features:

- Heavy Duty 2.5mm 308 SS exterior construction
 - Neoprene gaskets for lid and base
 - Fixed Rate Flow Restrictor (GOS40 @ 10 GPM, GOS80 @ 25 GPM)
 - Quick Disconnect Union for ease of flow-restrictor installation
 - Immersion Heater (UL Listed) to keep effluent warm during idle periods
 - Self-Closing Valve for simple maintenance
 - Strainer Basket to keep debris from getting into drain pipes
 - Easy access hinged lids for Strainer Basket and Oil Valve
 - Two Oil Collection Cassettes
 - Certified to ASME A112.14.3 and ASME A112.14.4
- Optional- Installation Package with 6" Legs or Castors/Quick Disconnects for mobility

Key Dimensions

Model #	Height	Length	Width	Height of Inlet (to center)	Height of Outlet (to center)	Electrical
GOS 40	14.4 "	24.0"	21.0"	12.4"	10.5"	110 Volt, 1000 watts, 9 Amps
GOS 80	20.5"	37.0"	21.0"	14.8"	12.4"	110 Volt, 1000 watts, 9 Amps

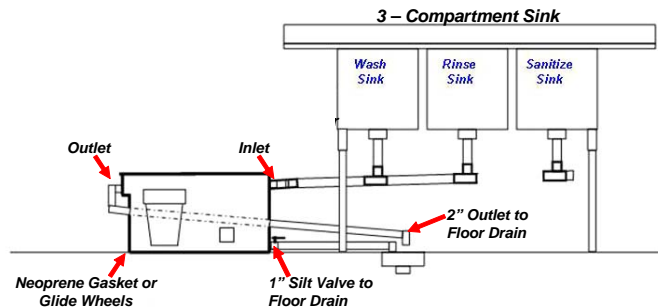

Goslyn LP
1536 Lantern Trl
Frisco TX 75034

Phone: (214) 618-3764
Fax: (214) 618-3765
www.goslyn.com